


# FOR CLEANER, QUICKER & GREENER INSTALLATIONS

**TruFit™**  
Powered by **millbruck**

**TRUFIT™ IS AN INNOVATIVE PRE-COMPRESSED FOAM SEALING TAPE**

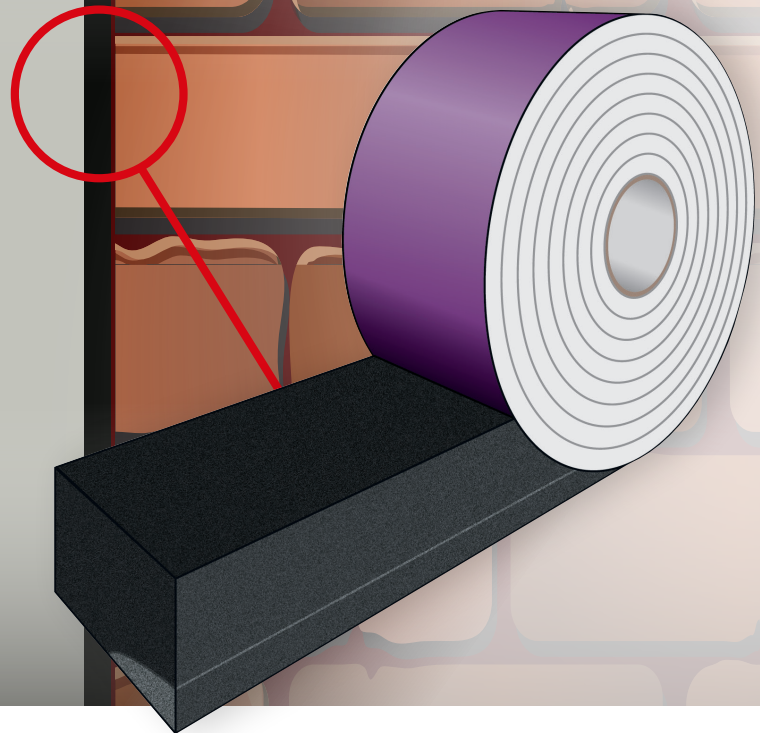

## WHAT IS TRUFIT™

TruFit™ is an innovative pre-compressed foam sealing tape for window and door installation from Edgetech UK. It provides an effective thermal barrier at the edge gap between the window or door frame and the reveal – ensuring true energy rating performance and a long-life weathertight seal.

## WHY CHOOSE TRUFIT™




**USER-FRIENDLY  
EXPANDING  
INSTALLATION TAPE**



**FEWER  
CALL-BACKS  
NEEDED**



**DELIVERS  
OUTSTANDING  
ENERGY EFFICIENCY**



**UP TO  
20% TIME  
SAVING**



**ADD VALUE AND  
PROFIT TO YOUR  
WINDOW ORDERS**



**FULL  
MARKETING  
SUPPORT**



**CLEANER AND  
QUICKER ONSITE  
APPLICATION**



**USABLE IN  
ALL WEATHER  
CONDITIONS**

## TECHNICAL INFORMATION

PROPERTY	RESULT
Building Classification	B2 (normally flammable)
Grouping	BG1 + BGR
Thermal Conductivity	$\lambda_{10} = 0.048 \text{ W/m.K}$
Water Vapour Diffusion Sd Value	< 0.5 m
Vapour Pressure Gradient	Less permeable inside due to side surface impregnation
Joint Permeability	$a < 0.1 \text{ m}^3/[\text{h.m.}(\text{daPa})^{-2}]$
Resistant to Driving Rain	600 Pa min.
Sound Insulation	45 dB in 10 mm joint
Compatibility with Traditional Building Materials	In accordance with BG1, perform a compatibility test on products that contain solvents or plasticisers
Emission Test	Suitable for interior use
Service Temperature	-30°C to +90°C
Storage	Store in dry, shaded conditions between +1°C and +20°C.
Shelf Life	9 months when stored in cool, dry conditions in original unopened containers.